PETROMARK® PRODUCT CATALOG







PETROMARK® 10107 INJECTOR CLEANER

PETROMARK® 10107 INJECTOR CLEANER is a special additive for effective and thorough cleaning and protection of the injectors. Internal contamination in the engine may largely be attributed to the presence of sediment such as gum, varnish etc. in the injectors. As a consequence over time the engine operation deteriorates and the fuel consumption increases considerably. Therefore it is important to clean the injectors every 10.000 km by adding PETROMARK® 10107 INJECTOR CLEANER. Regular use will keep the injectors in prime condition and ensure optimum engine performance. Suitable for all petrol engines with injection system, also for turbo engines. Completely safe for the catalytic converter. To be applied every 10.000 km and in case of malfunctions. The content of the 250 ml package is suitable for a tank content of max. 60 litres.

ART. NR. 10107 CONT. 250 ML Plastic Bottle



PETROMARK® 10137 HYBRID PETROL ADDITIVE

PETROMARK® 10137 HYBRID PETROL ADDITIVE is an additive with excellent cleaning operation and specially developed for modern hybrid vehicles with a gasoline engine. Hybrid vehicles are characterized by low fuel consumption and partly pure electric drive. The gasoline engine is often used in a cold state and results in many start-stop situations. In contrast to non-hybrid vehicles, the fuel remains relatively longer in the tank. That is why there is a fuel stabilizer added on this high-quality product, which ensures optimum aging stability. Offers optimum corrosion protection, prevents deposits and cleans the injection system. Reduces emissions of harmful exhaust gases. Suitable for all hybrid vehicles with a gasoline engine. Use preferably every 10,000 km. The contents of the 250ml. packaging is suitable for a tank capacity of max. 60 liters.

ART. NR. 10137 CONT. 250 ML Plastic Bottle



PETROMARK® 10117

PETROMARK® 10117 LPG ADDITIVE is especially developed for petrol engines equipped with a LPG-system. LPG equipped engines often develop serious problems over time when eventually the engine will not start on petrol. This is caused by residues, such as gum, dirt and varnish deposits inside the injectors, causing other malfunctions such as increased emission of harmful exhaust gasses, higher fuel consumption, loss of engine power and irregular idling speed. PETROMARK® 10117 LPG ADDITIVE cleans and lubricates the entire fuel systems and quarantees optimum engine performance and trouble-free operation of the LPG and injection system. Prevents build-up of gasoline deposits and oxidation. Suitable for all petrol engines with or without injection system. Completely safe for the catalytic converter. To be applied every 5.000 km and in case of malfunctions. The content of the 250 ml package is suitable for a tank content of max. 60 litres.

ART. NR. 10117 CONT. 250 ML Plastic Bottle



PETROMARK® 10108 VALVE CLEANER

PETROMARK® 10108 VALVE CLEANER cleans combustion deposits from valves, valve seats, plugs and cylinder heads, thoroughly and effectively and reduces harmful exhaust gasses and fuel consumption. This product increases compression and improves engine performance. Combines with water to prevent breakdown and corrosion. Ensures the fuel system remains in optimum condition when used regularly. Suitable for all petrol engines with injection system, also for turbo engines. Completely safe for the catalytic converter. To be applied in overhauls and in case of malfunctions. For intensive cleaning, pipe directly through the fuel pump. The content of this 250 ml package is suitable for a tank content of max. 60 litres.

ART. NR. 10108 CONT. 250 ML Plastic Bottle











PETROMARK® 10106 DIESEL INJECTOR CLEANER

PETROMARK® 10106 DIESEL INJECTOR CLEANER is a special additive for effective and thorough cleaning and protecting of the diesel injectors. Internal contamination in diesel engines may largely be attributed to the presence of sediment, such as gum, varnish etc. in the injectors. As a consequence over time the engine operation deteriorates and the fuel consumption increases considerably. This PETROMARK® product increases also the cetane number by 5 points. Therefore it is important to clean the injectors every 10.000 km by adding PETROMARK® 10106 DIESEL INJECTOR CLEANER. Regular use will keep the injectors in prime condition and ensures optimum engine performance. Suitable for all diesel engines, also common-rail engines, with or without turbo. To be applied every 10.000 km and in case of malfunctions. The content of the 250 ml package is suitable for a tank content of max. 60 litres.

ART. NR. 10106 CONT. 250 ML PLASTIC BOTTLE



PETROMARK® 10100 DIESEL SYSTEM CLEANER

PETROMARK® 10100 DIESEL SYSTEM CLEANER is a very effective diesel system cleaner with multifunctional qualities. Professional cleaning and protection of the fuel system; increased engine performance through effective cleaning of the injectors and increased cetane number by 5 points; contains a "LUBRICITY IMPROVER" for optimal lubrication of the diesel fuel pump; enhanced combustion and decreased emission of harmful exhaust gasses and reduced fuel consumption; protects the entire diesel fuel system against corrosion. Regular use will keep the fuel system in prime condition. Suitable for all diesel engines, including common-rail engines with or without turbo, for passenger cars and trucks; to be applied during regular maintenance or when the diesel fuel system malfunctions.

ART. NR. 10100 **CONT.** 500 ML METAL CAN



PETROMARK® 10136 HYBRID DIESEL ADDITIVE

PETROMARK® 10136 HYBRID PETROL ADDITIVE is an additive with excellent cleaning operation and specially developed for modern hybrid vehicles with a diesel engine. Hybrid vehicles are characterized by low fuel consumption and partly pure electric drive. The gasoline engine is often used in a cold state and results in many start-stop situations. In contrast to non-hybrid vehicles, the fuel remains relatively longer in the tank. That is why there is a fuel stabilizer added on this high-quality product, which ensures optimum aging stability. Offers optimum corrosion protection, prevents deposits and cleans the injection system. Reduces emissions of harmful exhaust gases. Suitable for all hybrid vehicles with a diesel engine. Use preferably every 10,000 km. The contents of the 250ml. packaging is suitable for a tank capacity of max. 60 liters.

ART. NR. 10136 CONT. 250 ML PLASTIC BOTTLE



PETROMARK® 10130 DPF - DIESEL PARTICLE FILTER CLEANER

PETROMARK® 10130 Diesel Particle Filter Cleaner is a fast working product that easily cleans and regenerates the clogged diesel particulate filter without disassembly. Driving short distances, traffic jams and urban traffic ensure that the particle filter becomes clogged. Also the engine power diminishes as it is more difficult for the exhaust to leave the polluted particulate filter. Petromark® 10130 Diesel Particle Filter Cleaner ensures an optimal cleaning and increases the lifespan of the particulate filter. Suitable for all diesel passenger cars, vans and trucks. Apply with mal functioning and / or every 3.000 km. Add the contents of the package to the fuel tank. The contents of the 500 ml package is suitable for a maximum fuel capacity of 60 litres.

ART. NR. 10130 **CONT.** 500 ML METAL CAN



PETROMARK® 10201 DPF - DIESEL PARTICLE FILTER CLEANER SPRAY

PETROMARK® 10201 DPF DIESEL PARTICLE FILTER CLEANER SPRAY. Diesel engines emit much more harmful soot particles, compared to petrol and/or LPG engines. By using a particle filter, the emissions of harmful gases reduces, which is better for our environment! Driving short distances, congestion and city traffic causes that the particle filter slowly silts up, as a result the exhaust gases pass through the filter more difficult and power decreases sharply. Therefore it is important to clean the particle filter regularly. A highly effective method to prevent this problem and/or remedy is to clean the particle filter with Petromark® 10201 DPF Diesel Particle Filter Cleaner Spray. Through the application of this effective cleaner a large part of the accumulated soot particles burn, so that the exhaust gases can pass through the filter quickly again.

ART. NR. 10201 **CONT.** 500 MI AFROSOL



PETROMARK® 10128/10129 PREMIUM DIESEL PARTICLE FILTER CLEANER SET

PETROMARK® 10128 PREMIUM DIESEL PARTICLE FILTER CLEANER is a fast acting product for cleaning and removal of soot and carbon deposits in the diesel particle filter which evaporates without leaving residues. This high quality product contains no metal and is non-flammable. Loosens and cleans off soot and carbon agglomerates from the porous honeycomb structures in the diesel particle filter.

Application: Fill the special Petromark® 10937 Pressure cup spray gun with Petromark® 10128 Premium Diesel Particle Filter Cleaner. Clean the diesel particle filter with the aid of the connected spray lance. Then rinse with Petromark® 10129 Premium Diesel Particle Filter Flush Concentrate.

PETROMARK® 10129 PREMIUM DIESEL PARTICLE FILTER FLUSHING CONCENTRATE is a concentrated flushing agent for rinsing after applying the Petromark® 10128 Premium Diesel Particle Filter Cleaner. Evaporates without leaving residues. After the treatment you will have a clean and re-usable diesel particle filter.

Application: Clean the diesel particle filter first with the Petromark® 10128 Premium Diesel Particle Filter Cleaner. Fill the special Petromark® 10937 Pressure cup spray gun with Petromark® 10129 Premium Diesel Particle Filter Flushing Concentrate. Rinse the diesel particle filter with the aid of the connected spray lance.

ART. NR. 10128 CO

CONT. 500 ML PLASTIC BOTTLE
CONT. 1 LTR PLASTIC BOTTLE

ART. NR. 10937

CONT. 1 PIFCF





DPF PRODUCTS







PETROMARK® 10420 INSTANT GASKET RED

PETROMARK® 10420 INSTANT GASKET RED in the unique POWER TUBES are designed for engines fitted with oxygen sensors and available in 3 different colours with several temperature ranges and applications. Ideal for replacement gaskets for valve covers, transmissions and sumps, water pumps, thermostat housings, asbestos exhaust manifolds and many more. PETROMARK® INSTANT GASKET RED resist transmission fluids, water, oil and antifreeze and replaces cork, paper, felt and rubber gaskets. These products are not recommended for use on head gaskets or for continuous immersion in petrol or diesel. The PETROMARK® INSTANT GASKET RED dispensers are easy to use with long-life performance and minimal waste.

Temperature range -73 °C up to + 343 °C

ART. NR. 10420 **CONT.** 200 ML POWER CAN



PETROMARK® 10421 INSTANT GASKET BLACK

PETROMARK® 10421 INSTANT GASKET BLACK in the unique POWER TUBES are designed for engines fitted with oxygen sensors and available in 3 different colours with several temperature ranges and applications. Ideal for replacement gaskets for valve covers, transmissions and sumps, water pumps, thermostat housings, asbestos exhaust manifolds and many more. PETROMARK® INSTANT GASKET BLACK resist transmission fluids, water, oil and antifreeze and replaces cork, paper, felt and rubber gaskets. These products are not recommended for use on head gaskets or for continuous immersion in petrol or diesel. The PETROMARK® INSTANT GASKET BLACK dispensers are easy to use with long-life performance and minimal waste.

Temperature range: -73 °C up to + 250 °C

ART. NR. 10421 CONT. 200 ML POWER CAN



PETROMARK® 10423 INSTANT GASKET GREY

PETROMARK® 10423 INSTANT GASKET GREY in the unique POWER TUBES are designed for engines fitted with oxygen sensors and available in 3 different colours with several temperature ranges and applications. Ideal for replacement gaskets for valve covers, transmissions and sumps, water pumps, thermostat housings, asbestos exhaust manifolds and many more. PETROMARK® INSTANT GASKET GREY resist transmission fluids, water, oil and antifreeze and replaces cork, paper, felt and rubber gaskets. These products are not recommended for use on head gaskets or for continuous immersion in petrol or diesel. The PETROMARK® INSTANT GASKET GREY dispensers are easy to use with long-life performance and minimal waste. Acid-free and especially developed for Japanese cars.

Temperature range: -50 °C up to + 315 °C

ART. NR. 10423 CONT. POWER CAN



PETROMARK® 10424 GASKET & CARBON REMOVER

PETROMARK® 10424 Gasket & Carbon Remover is a fast-acting product for easy removal of old gaskets and cove dust residues before installing a new gasket. Because of the fast and effective working, it is in many cases, not necessary to use a scraper and / or knife to remove the old gasket. That is why scratches and other damage on soft and delicate metal scan be avoid. Petromark® 10424 Gasket- & Carbon remover is an indispensable piece of liquid tools in every workshop.

ART. NR. 10424 **CONT.** 500 ML AEROSOL



PETROMARK® 10410 RADIATOR SEALER

PETROMARK® 10410 RADIATOR SEALER water-based and consists of natural resinous fibres, stabilizers and anti-corrosion additives in suspension. Recommended for sealing off leaks in radiators, heaters, cylinder heads and engine block cracks up to 0,9mm wide. Works guickly, permanently and reliably and cause no obstructions. Miscible with all types of anti-freeze and cooling liquids. Does not damage hoses, gaskets or metals. Suitable for cooling systems with a capacity of no more than 12 litres. By adding this product preventively to the cooling system it affords comprehensive leakage protection and guarantees a troublefree working system. Instructions for use: Shake canister well before use and add the content of the can to the cooling system when warm, with the engine running and with the cabin heating switched on. Keep engine running for approx. 10 minutes or drive a short distance. Dirty cooling systems should first be cleaned with PETROMARK® 10412 RADIATOR FLUSH.

ART. NR. 10410 CONT. 250 ML PLASTIC BOTTLE



PETROMARK® 10412 RADIATOR FLUSH

PETROMARK® 10412 RADIATOR FLUSH contains well-balanced cleaning agents like de-oxidation and descaling components which remove dirt, rust and lime deposits in the entire cooling system. Ensure an optimum heat exchange which prevents overheating of the engine. Does not affect metal, plastics, aluminium and rubber parts and is free of acids. Suitable for cooling systems with a capacity of no more than 12 litres. Instructions for use: Follow car manufacturers' directions to drain cooling system. Shake canister and add to the system and fill with fresh water. Turn on the heater and allow engine to warm-up. Run engine for 10 minutes, after reaching normal operation temperatures. Stop engine and drain radiator and allow cooling system to cool off. Refill with water and anti-freeze or coolant. (Follow car manufacturer directions). Do not add cold water to a warm cooling system!

ART. NR. 10412 CONT. 250 MI PLASTIC BOTTLE



PETROMARK® 10413 COOLING SYSTEM DEGREASER


PETROMARK® 10413 Cooling System Degreaser is an extremely effective cleaning agent based on high quality

solvents specially formulated for oily deposits which have arisen as a result of leakage from a leaking head gasket, leakage from the heat exchanger or cavitation of the cylinder bushings in the cooling system. This product also emulsifies sludge formation in the cooling system. In particular, oil in the cooling system is difficult to remove due to

applying standard cooling system cleaners. The powerful and effective cleaning of the Petromark® 10413 Cooling system Degreaser ensures optimal cleaning of the cooling system which reduces heat transfer and cooling capacity of the cooling system again restored.

ART. NR. 10413 **CONT.** 500 MI METAL CAN











PETROMARK® 10105 OIL STOP

PETROMARK® 10105 OIL STOP is a very effective liquid tool, with three important features which in many cases prevents expensive engine repairs. First PETROMARK® 10105 OIL STOP prevents oil leaks from rubber gaskets, crankcase and valve-strem oil seals. The second important property is it reduces oil consumption from between the piston and cylinder-wall by increasing the viscosity of the oil at operating temperature resulting in improved combustion from a higher compression ratio in the engine. And thirdly it stops or reduces the blue exhaust fumes caused by oil bypassing the piston rings into the combustion chamber. Suitable for max. 6 litres motor oil. Add one can at every oil change when engine is at operating temperature. Suitable for petrol, diesel and LPG engines.

ART. NR. 10105 CONT. 250 ML PLASTIC BOTTLE



PETROMARK® 10109 ENGINE FLUSH

PETROMARK® 10109 ENGINE FLUSH cleans sludge, gum, rust and varnish formations from the inside of the engine within 10 minutes. Helps to release stuck valves and piston rings. Increases compression and improves engine performance. Reduces dangerous exhaust gasses and improves fuel consumption. Harmless to metal parts. Suitable for all petrol, diesel and LPG engines. Contents suitable for max. 4 litres engine oil. Can be added to mineral, synthetic or semi-synthetic oil. Keeps the engine in optimum condition and performance. Instructions for use: Shake canister before use and add to the engine oil at operating temperature. Allow engine to run for 10 minutes at approx. 1.500 rpm. Then switch-off engine and drain engine oil. Replace the oil filter and refill engine with new engine oil as recommended by the engine manufacturer.

ART. NR. 10109 CONT. 250 ML PLASTIC BOTTLE



PETROMARK® 10118 PREMIUM OIL TREATMENT

PETROMARK® 10118 PREMIUM OIL TREATMENT is high-tech oil treatment designed to keep the engine running as smooth as new. Stops oil consumption, improves compression, increases oil pressure, and protects against wear and friction. Improves engine durability and stops blue exhaust smoke. Suitable for petrol, diesel and LPG engines. The content of this package is suitable for max. 6 litres engine oil and needs to be applied when engine is at operating temperature.

ART. NR. 10118 **CONT.** 444 ML METAL CAN



PETROMARK® 10123 HYDRAULIC VALVE LIFTER

PETROMARK® 10123 HYDRAULIC TAPPET ADDITIVE is a very special oil additive which dampens the noise produced by worn hydraulic valve. It cleans the valves and oil ways in the hydraulic tappet and promotes optimum operation. Suitable for max. 6 litres motor oil. Add the entire contents of the 250 ml. bottle to the oil when engine is at operating temperature. This PETROMARK® product can be mixed with all types of motor oil. Suitable for all petrol, diesel and LPG engines.

ART. NR. 10123 CONT. 250 ML PLASTIC BOTTLE



PETROMARK® 10213 ONE SHOT CAR REFRESHER

PETROMARK® 10213 ONE SHOT CAR REFRESHER is a high quality and easy to use spray based on a well-balanced fragrance mixture, which deodorizes the interior of the vehicle and gives a lengthy pleasant odour. The unique composition will replace unpleasant smells by a fresh subtle scent.

ART. NR. 10213 **CONT.** 150 ML AEROSOL



PETROMARK® 10212-NL AIRCO CLEANER FOAM

PETROMARK® 10212-NL AIRCO CLEANER FOAM is a high quality ultra-active foaming cleaning product for all air-conditioning systems. Deodorizes the system rapidly and leaves a pleasant fragrance.

ART. NR. 10212-NL CONT. 250 ML AEROSOL







PETROMARK® 10448 SUPER FAST GLUE

PETROMARK® 10448 SUPER FAST GLUE is an universal adhesive "surface insensitive" standard superglue, which is comparable to normal universal grades, very insensitive to inactive or difficult surfaces. Suitable for most applications with no extreme requirements. for universal use and suitable for various materials such as metal parts, plastic parts and rubber parts. This high-quality glue stands out because both viscosity (of curing speed) and strength have a very balanced relationship.

ART. NR. 10448 **CONT.** 20 GR BOTTLE





PETROMARK® 10449 REAR-VIEW MIRROR ADHESIVE

PETROMARK® 10449 REAR-VIEW MIRROR ADHESIVE is a product for bonding glass and metal to and among each other, for example interior mirrors of vehicles or metal handles on glass doors.

Solvent-free, very good chemical resistance, water and impact-resistant, durable bonding. Thermal Range -55° C till + 150° C.

ART. NR. 10449 **CONT.** 1 BOX INC. 5 SETS



PETROMARK® 10440 THREADLOCKER BLUE

PETROMARK® 10440 THREADLOCKER BLUE is a blue fluorescent threadlocker with medium strength, which closes and locks bolts and nuts to prevent it comes loose with vibrations and shocks. Excellent alternative to Loctite 243. Suitable for stainless steel and galvanized steel. Medium strength which means removable with normal hand tools. Temperature resistant up to 150 ° C. Clearances up to 0.25mm. Prevents loosening nuts and bolts. Very durable. Resistant to many alkaline solutions, solvents, oils, fuels and gases. Fluoresces under UV light for inspection and quality control.

ART. NR. 10440 **CONT.** 50 ML BOTTLE



PETROMARK® 10441 THREADLOCKER RED

PETROMARK® 10441 THREADLOCKER RED is a red high strength fluorescent locking agent for securing threaded connections such as studs. Excellent alternative to Loctite 262. For securing, sealing and fixing of bolts, nuts, studs, thread inserts and thread plugs, which normally should not be detached. High strength, making it difficult to disassemble.

Temperature resistant up to 150 $^{\circ}$ C. Clearances up to 0.25mm. Prevents nuts and bolts from vibrating loose.

Protects against corrosion by friction and against rust. Resistant to oils, gases, solvents and fuels. Fluoresces under UV light for inspection and enable quality control.

ART. NR. 10441 **CONT.** 50 ML BOTTLE



PETROMARK® 10442 THREADLOCKER PURPLE

PETROMARK® 10442 THREADLOCKER PURPLE is a purple low strength fluorescent locking agent with medium viscosity. Excellent alternative to Loctite 222. Suitable for threated joints, which are removable later on and for small threads.

Suitable for all metal threaded assemblies. Low strength, making it easy to disassemble. Thermal range – 55 ° C0 up to +150 ° C. Clearances up to 0,20mm. Specially developed for screws with length of 2D. For threadlocking screws with fine pitch threads. Stops screws vibrating loose and seals against leakage. Fluoresces under UV light for inspection and enable quality control.

ART. NR. 10442 **CONT.** 50 ML BOTTLE



PETROMARK® CERAMIC PASTE

PETROMARK® CERAMIC PASTE is a high-tech connection and assembly paste which consists of very small ceramic parts divided in a non-melting bentone grease. Does not contain any metals and reduces wear on places with high friction. Provides quick and easy dismantling of wire connections and packing, even after having been exposed to high temperatures until 1.200°C, corrosive atmospheres or high pressures. Prevents cavitation and etching. Water resistant and will not be affected by acids, alkalise or salts. Temperature range -40°C up to 1.100°C. Use: Wire connections, brake-pads, chains, cranes, engine parts etc.

ART. NR. 10233
ART. NR. 10404
ART. NR. 10429
CONT. 500 GR PLASTIC CAN
CONT. 200 ML PRESSUREPACK



PETROMARK® 10207 WHITE GREASE + PTFE

PETROMARK® 10207 WHITE GREASE + PTFE is an universal highgrade white grease with PTFE with excellent corrosion resistant qualities. Water-proof and penetrates into inaccessible places for optimal lubrication. Ensures optimal lubrication under the most extreme circumstances and conditions.

ART. NR. 10207 **CONT.** 400 ML AEROSOL



PETROMARK® 10211 MULTI SPRAY

PETROMARK® 10211 MULTI SPRAY is a multifunctional liquid to clean, protect and lubricate. Besides these properties it has excellent water resistance qualities and unique penetrating characteristics. Penetrates into inaccessible places for optimal lubrication. Resistant to cold, hot and salt water. Loosens rusty bolts, nuts, screws, locks and hinges. Rust preventing and sticks to any surface and does not affect lacquer. A very effective liquid tool for workshops, garages, etc.

ART. NR. 10211 **CONT.** 500 ML AEROSOL



PETROMARK® 10234 BRAKE PROTECTION & SERVICE SPRAY

PETROMARK® 10234 BRAKE PROTECTION & SERVICE SPRAY is a special light-blue full synthetic lubricant which prevents wear and tear and squealing noises. Free of heavy metals such as aluminium and copper and ideal for corrosion protection. Extreme high pressure and heat resistant: tested up to 1.200°C long-term and short-term up to 1.500°C. Suitable for ABS Systems. Prevents sticking and seizing and is salt water resistant. Applications: all screw thread connections, spark-plugs, exhausts etc. and ideal for brake pads. Shake can before use and clean surface. Spraying distance 25 cm.

ART. NR. 10234 CONT. 400 ML AEROSOL







PETROMARK®COPPER PASTE

PETROMARK® COPPER PASTE is a universal high-grade copper grease paste which prevents rusting, corroding and seizing together of screw thread connections. Protects against corrosion and is resistant to high pressures and temperatures from -35°C up to + 1.100°C. Guarantees simple mounting and demounting of screw thread connections under extreme circumstances. Use: spark-plugs, exhausts, exhaust manifolds, wheel nuts, flanges, fittings, cranes, pipe joints, winches etc.

 ART. NR. 10202
 CONT. 400 ML AEROSOL

 ART. NR. 10401
 CONT. 500 GR PLASTIC CAN

 ART. NR. 10427
 CONT. 200 ML PRESSUREPACK



PETROMARK® 10206 POWER PLUS OIL

PETROMARK® 10206 POWER PLUS OIL is a combination of special lubricants and fast working rust dissolvers with a high penetrating effect due to its low surface tension. Therefore this product is capable dissolving tightly seized parts in the least accessible places under all circumstances. Can be applied on all types of metal also to sensitive joints such as steel bolts in aluminium to prevent damage when unbolting. Moisture resistant and protects against wear and corrosion. Directions for use: after treating the parts wait 2-3 minutes! Shake well before use.

ART. NR. 10206 **CONT.** 500 ML AEROSOL



PETROMARK® 10205 PENETRATING OIL + MoS2

PETROMARK® 10205 PENETRATING OIL + MoS2 is a high-grade multifunctional oil to which Molybdenum Sulphide (MoS2) has been added to guarantee lubrication under extreme conditions. Cleans dirt and grime, loosens rust and scale and penetrates seized parts. Penetrates into inaccessible places and contains excellent moisture resistant qualities resulting in a quick loosening of rusted nuts, bolts, hinges, spark-plugs, aerials, locks, exhausts etc. Protects metal parts against wear and corrosion.

ART. NR. 10205 **CONT.** 500 ML AEROSOL



PETROMARK® 10224 POWER SHOCK

PETROMARK® 10224 Power Shock is a revolutionary powerful rust remover which is the ideal combination of a strong cold shock effect and a very good capillary action which makes rusted parts quickly and efficiently loosens. This high-quality rust remover is MoS2 added for an extra lubricating effect which prevents possible damage during the disassemble. Due to the extra fast evaporation of the propellant from the aerosol becomes the treated substrate cooled to about -50 °C causing micro cracks in the oxidation and the active liquid can penetrate faster and easier. Because a lot of mounting points are difficult to reach is the aerosol equipped with a special valve so that it can be used in every stand. PETROMARK® POWER SHOCK does not attack rubber and is moisture repellent.

ART. NR. 10224 **CONT.** 500 ML AEROSOL



PETROMARK® 10225 TEFLON OIL

PETROMARK® 10225 Teflon Oil is a high quality lubricant based on P.T.F.E. which is long lasting and guarantees excellent lubrication. The product has a low frictional resistance and a wide temperature range from -50°C to + 250°C. Protects against corrosion, has excellent lubricity, is pressure resistant, well penetrating and displacing moisture. Suitable for various surfaces and for everything that hinges, rolls and slides in all weather conditions.

ART. NR. 10225 **CONT.** 500 ML AEROSOL



PETROMARK® 10235 VISCO LUBE

PETROMARK® 10235 VISCO LUBE is a high pressure resistant transparent adhesive lubricant which lubricates parts exposed to strong pressure, impacts or vibration. Extremely high holding power for both metal and other materials. Is derived from a high quality synthetic grease that preserves the treated parts in a damp environment. The material is fluid and penetrates into inaccessible places. Long lasting effectiveness in places which cannot be lubricated in short term intervals. PETROMARK® 10235 VISCO LUBE has a temperature range from -35°C up to + 225°C and is resistant to corrosion. Use: Cogs and wheels, open gearboxes, chains, hinges, steel cables, winches, sealing faces, door springs, gear racks, treated spindles, hinge points etc.

ART. NR. 10235 CONT. 600 ML AEROSOL



PETROMARK® 10240 SILICON SPRAY

PETROMARK® 10240 SILICON SPRAY provides safe and protective lubrication of plastic and rubber parts and waterproofs ignition systems, locks and fuse boxes. Apart from lubricating, conserving and corrosion resistant qualities this product also repels water and moisture resistant qualities and is non-toxic.

ART. NR. 10240 CONT. 600 ML AEROSOL



PETROMARK® 10402 ALUMINIUM PASTE

PETROMARK® 10402 ALUMINIUM PASTE is a high-tech paste for fast and easy assembly of wire connections. Protects against corrosion and is resistant to high pressure and temperatures from -40°C up to 1.100°C. Guarantees simple demounting under all circumstances of all screw thread connections. Reduces wear at places with high friction. Prevents cavitation and etching. Use: all screw thread connections, flanges, fittings, etc.

ART. NR. 10402 CONT. 500 GR PLASTIC CAN



PETROMARK® 10403 SILICON GREASE

PETROMARK® 10403 SILICON GREASE is a universal high-grade silicon paste for use in high temperature applications. Based on a silicone oil and inert fillers this product has been developed for the electrical insulation anti-adherence and anti-seizing. Suitable for long term lubrication due to its high resistance to chemicals, ozone, water, oil and greases. Suitable for lubrication of low speed bearings and sliding mechanisms. Does not affect rubber or plastic and therefore perfect for caliper and wheel cylinder assembly work. Compatible with all rubber compounds including nitrile, Teflon, nylon and other synthetic rubbers. Temperature range -50°C up to +200°C.

ART. NR. 10403 CONT. 500 GR PLASTIC CAN



PETROMARK® 10405/10406 LITHIUM (COMPLEX) EP-2 GREASE

PETROMARK® LITHIUM (COMPLEX) EP-2 GREASE is universal high performance, all-purpose grease with Extreme Pressure additives offering an excellent corrosion protection and very good anti-oxidation properties. Especially developed for lubrication of automotive and industrial equipment. Extremely suitable for high working temperature conditions, heavy loads etc. Petromark® 10406 Lithium EP-2 Grease is water-resistant and has a good mechanical stability so that it will not be pressed out of bearings. Suitable for automotive equipment, hinges, sliding surfaces, chains, cables, winches, light open gears, steel ropes and cables of machinery and lifts. Temperature range -25°C up to +130°C. For use at extremely high temperatures we recommend PETROMARK® 10405 LITHIUM COMPLEX EP-2 GREASE. Temperature range -30°C up to +150°C.

ART. NR. 10405 CONT. 500 GR PLASTIC CAN
CONT. 500 GR PLASTIC CAN




PETROMARK® 10407 MoS2 EP-2 GREASE

PETROMARK® 10407 MoS2 EP-2 GREASE is a high-performance multi-purpose grease especially developed for homokinetic joints. The addition of Molybdenum disulphide (MoS2) ensures very good lubrication even after grease leaks due to excessive temperature increase. Based on mineral base oils, lithium soap thickener and MoS2. Offers excellent resistance against corrosion and oxidation, and is water-repellent. Good mechanical stability resulting in a very long life-time of this grease. Petromark® 10407 MoS2 EP-2 Grease has excellent anti-wear characteristics and very high resistance to extreme pressures. Suitable for the lubrication of heavily loaded plain bearings, homokinetic joints, chassis lubrication points, agricultural machinery. Temperature range -30°C up to +125°C.

ART. NR. 10407 CONT. 500 GR PLASTIC CAN



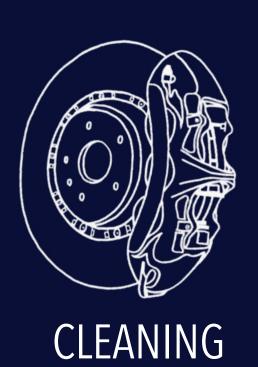





PETROMARK® RAPID CLEANER

PETROMARK® RAPID CLEANER is a biodegradable multi cleaner for the effective and environmentally safe cleaning of brake & clutch components. Contains no chlorinated hydrocarbons. Does not corrode plastic and rubber components. A versatile, high-grade cleaning agent that even dissolves resinified contamination. Simply spray on and leave for 5 minutes and wash off with water, fully biodegradable.

ART. NR. 10210 CONT. 600 ML AEROSOL
ART. NR. 10901 CONT. 5 L METAL CAN
ART. NR. 10904 CONT. 25 L JERRY CAN
ART. NR. 10905 CONT. 60 L DRUM



PETROMARK® 10204 ELECTRONIC CLEANER

PETROMARK® 10204 ELECTRONIC CLEANER is very effective cleaning agent for electric and electronic components like micro switches, connecting sleeves, etc. PETROMARK® ELECTRONIC CLEANER is not conductive and removes deposits of moisture, dirt and grease from critical components, preventing faulty operation and damage through contamination of the components. If necessary lubricate moving parts after treatment.

ART. NR. 10204 **CONT.** 400 ML AEROSOL



PETROMARK® 10247 GLASS CLEANER FOAM

PETROMARK® 10247 GLASS CLEANER FOAM is a high quality and very effective cleaning product based on water and special cleaning additives. This PETROMARK® product removes greasy finger marks and does not affect rubber and lacquer. PETROMARK® 10247 GLASS CLEANER FOAM also removes squashed insects, grime and traffic deposits without a problem and gives a sparkling finish to all windows and mirrors. This product is antistatic and removes nicotine residues affectively. Directions for use: Shake can well before use and spray sparingly onto surface, spread with soft cloth. Wipe off immediately and polish with a clean dry cloth.

ART. NR. 10247 CONT. 600 ML AEROSOL



PETROMARK® 10251 AIR INTAKE CARB & CHOKE CLEANER

PETROMARK® 10251 AIR INTAKE CARB & CHOKE CLEANER dissolves gum, carbon and varnish deposits without dismantling. Not harmful to catalytic converter. Reduces the CO and HC levels. Only for petrol engines! Directions for use: Carburettor petrol engines: Spray inside carburettor and linkages, remove air filter and spray the liquid on the throttle plate and air intake. Injection petrol system engines: Spray the liquid in air intake pipe and open end of the PVC valve.

ART. NR. 10251 **CONT.** 500 ML AEROSOL



PETROMARK® 10226 LEAK DETECTOR SPRAY

PETROMARK® 10226 LEAK DETECTOR SPRAY is a product in an easy to use aerosol that allows easy detection of suspected leaks. This product starts producing bubbles at areas where a leak is present. Designed for tracing leaks in all pressurized gas systems, compressed air, helium, nitrogen etc. as well in iron, copper and plastic piping. DIRECTIONS FOR USE: Shake can well before use. Subtrate should be clean and dry. Keep spray distance at 20-30 cm and spray area to be treated and see where foam building appears. Rinse the product off by water when used on plastic or copper pipes. Product is non-toxic and non-flammable.

ART. NR. 10226 **CONT.** 400 ML AEROSOL



PETROMARK® 10220 TOTAL ENGINE CONDITIONER

PETROMARK® 10220 TOTAL ENGINE CONDITIONER is a high-grade professional cleaning product for internal combustion engines. A dirty combustion chamber, intake manifold etc. adversely affects the engine performance. It also needlessly increases the emission of carbon monoxide (CO), unburned gases (HC) and fuel consumption. PETROMARK® 10220 TOTAL ENGINE CONDITIONER dissolves and removes carbon deposits and lacquer-like compounds throughout the entire combustion system. This professional product effectively cleans inlet throttle, intake-manifold, valves, pistons, piston rings and / or carburettor. PETROMARK® 10220 TOTAL ENGINE CONDITIONER contains no substances that may damage plastics, rubber or metal parts. It is completely safe for the catalytic converter and lambda sensor. To achieve an optimal result treatment has to be done by a professional workshop!

ART. NR. 10220 **CONT.** 200 ML AEROSOL



PETROMARK® 10248 TYRE FITTING LUBE

PETROMARK® 10248 TYRE FITTING LUBE is a high-quality lubricant for assembling and disassembling rubber parts. Unique product for (de)mounting car, motorcycle, truck, tractor and forklift tyres. Because of the special formulation, this product provides excellent lubrication and reduces the frictional resistance of all rubber parts. This results in an easier mounting and demounting of any type of tyre. Excellent glide and penetrating properties. Free of silicon, transparent colour and dries up completely without leaving any residue.

ART. NR. 10248 **CONT.** 500 MI AFROSOL



PETROMARK® 10223 INTERIOR SPRAY

Petromark® 10223 Interior Spray is a high quality fully synthetic antistatic silk gloss lubricant to remedy squeaking and creaking in the interior of the car. Ideally suited for difficult running safety belts and optimal care of plastic and rubber parts, window frames and door seals. Petromark® 10223 Interior Spray prevents discoloration of plastic parts with UV protection and is dirt and dust repellent.

Features: Anti-static. Dirt and dust repellent. Prevents discolouring of plastic parts. Silicone-free.

Applications: Ideal for difficult-running safety belts. For optimal care of plastic and rubber parts, window frames and door seals.

ART. NR. 10223 **CONT.** 400 ML AEROSOL









PETROMARK® 10219 COCKPIT SPRAY

PETROMARK® 10219 COCKPIT SPRAY cleans and protects all plastic and vinyl parts of the dashboard and upholstery in the car. Is anti-static and protects treated components from discoloration. Contains no silicones and is completely colourless. PETROMARK® 10219 COCKPIT SPRAY creates the original matt-effect on the treated parts. This product prevents drying-out and sticking of plastic parts. Shake can well before use. Spray PETROMARK® 10219 COCKPIT SPRAY about 25 cm away from the surface and rub afterwards with a soft cloth.

ART. NR. 10219 **CONT.** 500 MI AFROSOL



PETROMARK® 10209 STARTING FLUID

PETROMARK® 10209 STARTING FLUID is a highly concentrated liquid product for fast and easy starting of the engine, especially at low temperatures. PETROMARK® STARTING FLUID is suitable for all diesel- and petrol engines (also turbo). This product is made of special components and high technology. Tested in extreme conditions. Suitable also for motorbikes, boat engines, lawn mowers etc. Directions for use: Diesel engine: Spray for approximately 2 sec. in the air intake and then crank engine. Petrol engine: Spray for 2 sec. in the air intake or carburettor and then crank engine keeping rpms up after starting.

ART. NR. 10209 **CONT.** 400 MI AFROSOL



PETROMARK® 10236 CHAIN SPRAY

PETROMARK® 10236 Chain Spray is an advanced chain spray with an excellent protective effect against wear. Suitable for fast rotating chains and chains used under high pressure. This synthetic chain spray uses high-quality additives that ensures a minimal friction. The solvent used in this Petromark® product which ensures this high quality lubricant, spreads well over the chain and penetrates deep into the treated parts. Petromark® 10236 Chain Spray is water resistant, anti-corrosion and reduces the stretch of the chain.

ART. NR. 10236 **CONT.** 400 ML AEROSOL



PETROMARK® 10931/10931-1 AEROSOL RACK

Petromark® 10931 aerosol rack is a wire rack specially developed to store 6 PETROMARK® aerosol cans.

ART. NR. 10931

CONT. 1 AEROSOL RACK

ART. NR. 10931-1 CONT. 1 AEROSOL RACK WITH PLATE



PETROMARK® 10941 RAPID CLEANER FAUCET 60 LITER

Petromark® 10941 RAPID CLEANER FAUCET is a faucet suitable for the PETROMARK® Rapid Cleaner 60 liter.

ART. NR. 10941

CONT. 1 TAP



PETROMARK® 10934 RAPID CLEANER PUMP SPRAYER

Petromark® 10934 RAPID CLEANER PUM SPRAYER is a sprayer which can be used to work with the PETROMARK® RAPID CLEANERS 25 or 60 liters.

ART. NR. 10934 **CONT.** 1 SPRAYER



PETROMARK® 42001 RAPID CLEANER FAUCET 25 LITER

Petromark® 10941 RAPID CLEANER FAUCET is a faucet suitable for the PETROMARK® Rapid Cleaner 25 liter.

ART. NR. 42001

CONT. 1 TAP







PETROMARK AUTOMOTIVE CHEMICALS BV | BEVERWIJK THE NETHERLANDS | MADE IN HOLLAND PHONE: +31 251 211397 | INFO@PETROMARK.EU





